

JANOME

ML544D



OVERLOCKER SERIES

ML544D

JANOME

ML544D Features

3 or 4 thread overlocking	Lay-in thread tension dials
Built-in thread cutter	Colour coded thread paths
Cutting width 3.1mm – 7.3mm	Easy conversion to rolled hem
Differential feed ratio 0.5 - 2.25	Stitch length 1mm – 4mm
Clip on feet	4 bonus attachments packaged in machine carton
Needle System HA15xISP (Janome Ballpoint needles)	Weight 8Kg

Easy Rolled Hem Change-Over

No need to change the needle plate for rolled hemming. Just slide the needle plate setting knob to "R" position to convert the plate for rolled hemming.



Bonus Attachments

- Gathering attachment
- Elastic attachment
- Blind stitch foot
- Cording foot



Lay-in Thread Tension Dial

The concealed threading path assures stable sewing results. The disc's within each tension dial open when the sewing foot is raised and close when the foot is down. This feature makes threading or pulling threads through, when changing threads, fast and easy.



Differential Feed

The differential feed device is designed to prevent fabrics from puckering or stretching.


It is simple to operate and can be used to create special effects like gathering and lettuce leaf edging.



Range of Differential Feed Ratio

Stretched edges on knit fabrics are prevented by setting the differential feed dial between 1.0 and 2.2.

Puckered edges on woven fabrics are prevented by setting the differential feed dial between 0.5 and 1.0.

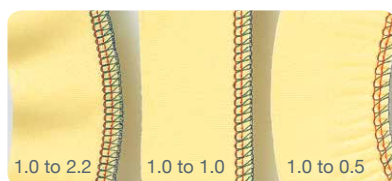

Ready to Sew

Overlocker is fully threaded and ready to sew, when unpacked from the carton.



JANOME

AUSTRALIA

Janome Australia Pty Ltd.
PO Box 1383, Moorabbin 3189 Victoria
www.janome.com.au

NEW ZEALAND

Janome New Zealand Ltd.
PO Box 447, Drury, Auckland 2247
www.janome.co.nz

AVAILABLE FROM YOUR EXPERT JANOME RETAILER